

CP502425 3.0V

Equivalent:

Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

- | | |
|--|-----------|
| ○ Nominal capacity | 550mAh |
| Discharged capacity at 1.0mA, +25°C, 1.8V cut off | |
| ○ Open circuit voltage | 3.0V |
| ○ Max. recommended continuous current | 40mA |
| Discharged to 1.8V at +25°C permitting 50% of the nominal capacity to be achieved | |
| ○ Max. Pulse capability | 150mA |
| 150mA pulse discharge for 15 seconds, the cut off voltage is 1.8V, drained with 50% at 25°C the value may vary according to the pulse characteristics, the temperature and the cell's previous history | |
| ○ Operating temperature rang | -20~+60°C |

STORAGE:


Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)

WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 80°C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

Key features

- High and stable operating voltage
- Long shelf life
- Annual self-discharge rate lower than 2% at +20°C
- airtightness warranty
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition
File Number MH46165



Main applications

- active electronic tags
- active chips
- Alarms or security equipment
- Smoke detectors
- Memory backup
- Real time clock
- Professional electronic equipment
- Medical equipment

.....


CP502425 550mAh

Discharge characteristics at 25°C

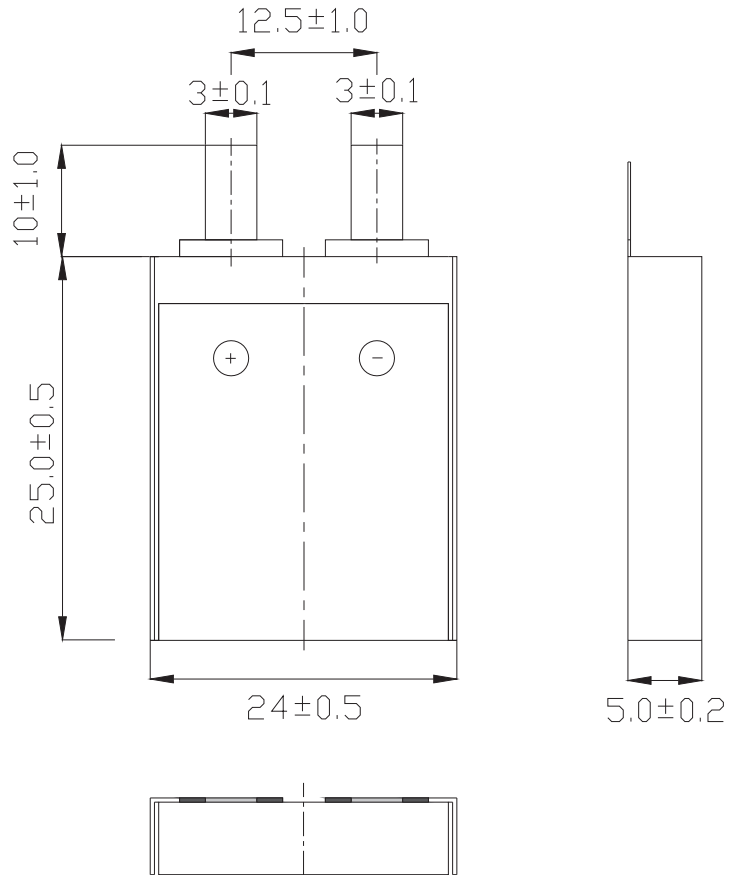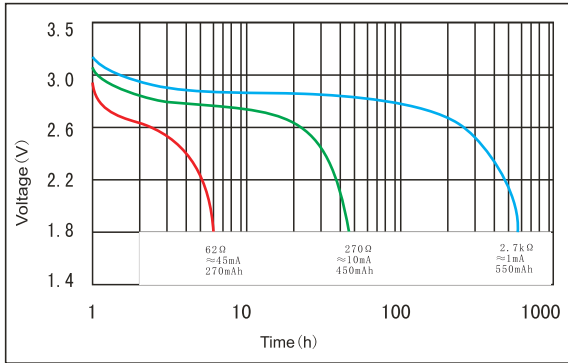


Dimensions in mm
Weight: 5.5g


Voltage vs Current curve

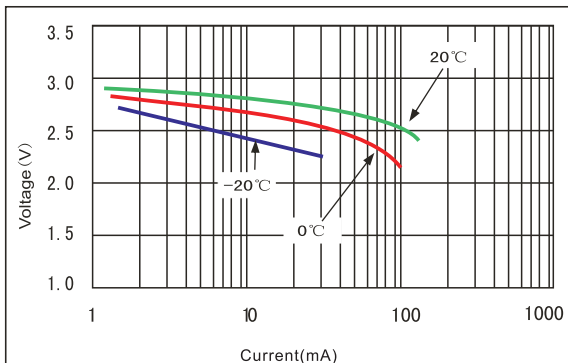

Capacity vs Current curve

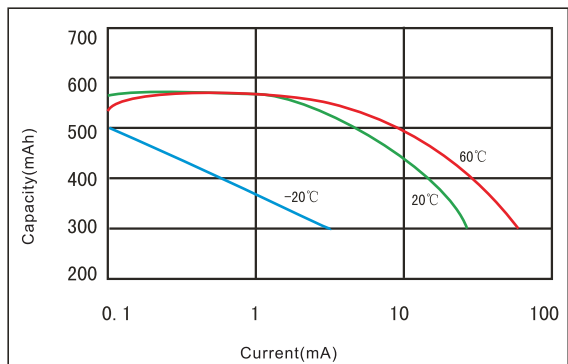

Discharge characteristics after storage

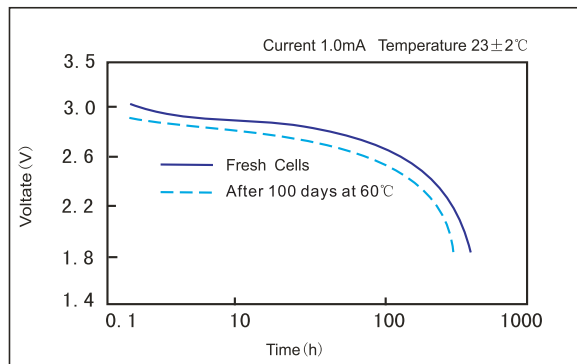

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fanso.