

# SPECIFICATION



## CR17335H 3.0V



### Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

○ Nominal capacity	1800mAh
Discharged at 1mA, +25°C, 2.0V cur off	
○ Nominal voltage	3.0V
○ Max. recommended continuous current	15mA
Discharged to 2.0V at +25°C permitting 50% of the nominal capacity to be achieved	
○ Max. Pulse capability	100mA
100mA/15s pulses drained from mid-discharged cells at 1mA 25°C, yield voltage readings above 2V	
○ Operating temperature range	-30 °C ~ +60 °C

### STORAGE:

Stored in clean, dry and cool circumstances (the temperature should be less than 30°C)

### WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 100°C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply.

### Key features

- High and stable operating voltage
- Low self-discharge rate  
Annual self-discharge rate lower than 1% at +20°C
- Nickel-plated steel shell
- Glass to metal seal
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 U L Component Recognition  
File Number MH46165



### Main applications

- Alarms or security devices
- Smoke detectors
- Memory backup
- Real time clock
- Professional electronics
- Medical devices


.....

# CR17335H 1800mAh

## Discharge characteristics at 25°C

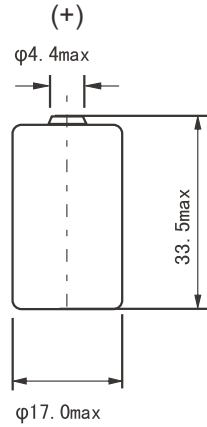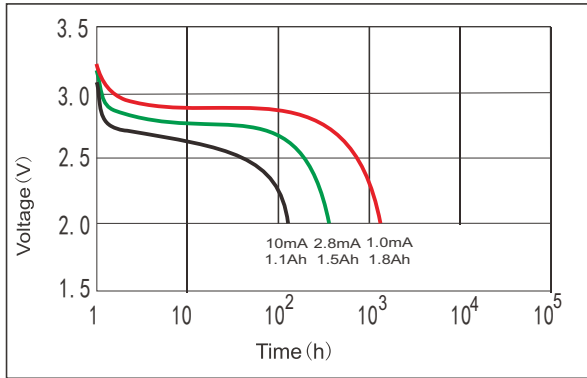


## Voltage vs. Current

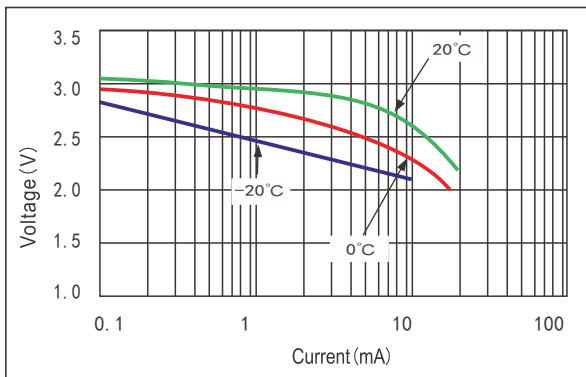


Dimensions in mm  
Weight: 23g

Standard Terminals	
-/P	Axial pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab
Customized terminals are available	

## Capacity vs. Current

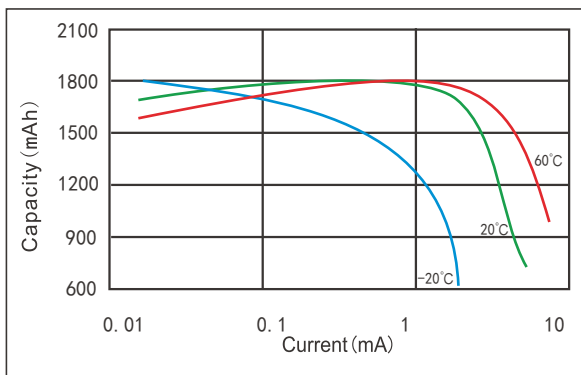

## Storage characteristics

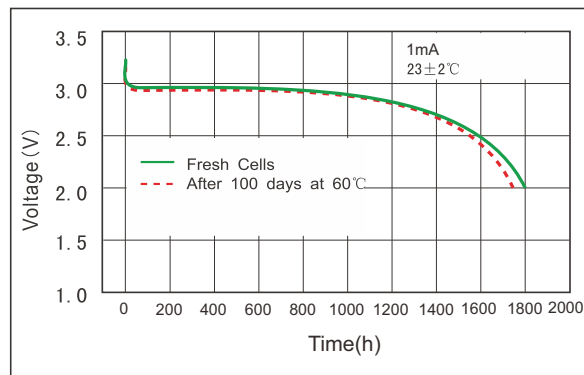

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fanso.

WUHAN FANSO TECHNOLOGY CO.,LTD.

Address: No.1 Sitai Industrial Park, YongFeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-84452919 / 84458099 Fax: 86-27-84453116 Post Code: 430051

Http://www.fansobattery.com E-mail: overseas@fansobattery.com